



**Rapidox 2100 Sensor Probe**  
**Optional 450mm stainless steel tube probe**


**Description**

The Rapidox 2100 optional sensor probe comes with either DN or KF flange fitting (specified at the time of ordering). Maximum gas temperature is 200° C. The standard probe can be supplied with an external sheath to be permanently attached to the equipment. This is supplied with a blanking cap allowing the user to remove the probe for maintenance or transfer to another machine whilst maintaining the integrity of the seal. Can be used with any 2100 series analyser including the 2100W wall-mount box if an IP rating is required.

**Cambridge Sensotec Ltd: Oxygen sensor extension probe**

Part number: MT013

\*To have four 5mm ventilation holes drilled at 90° to each other

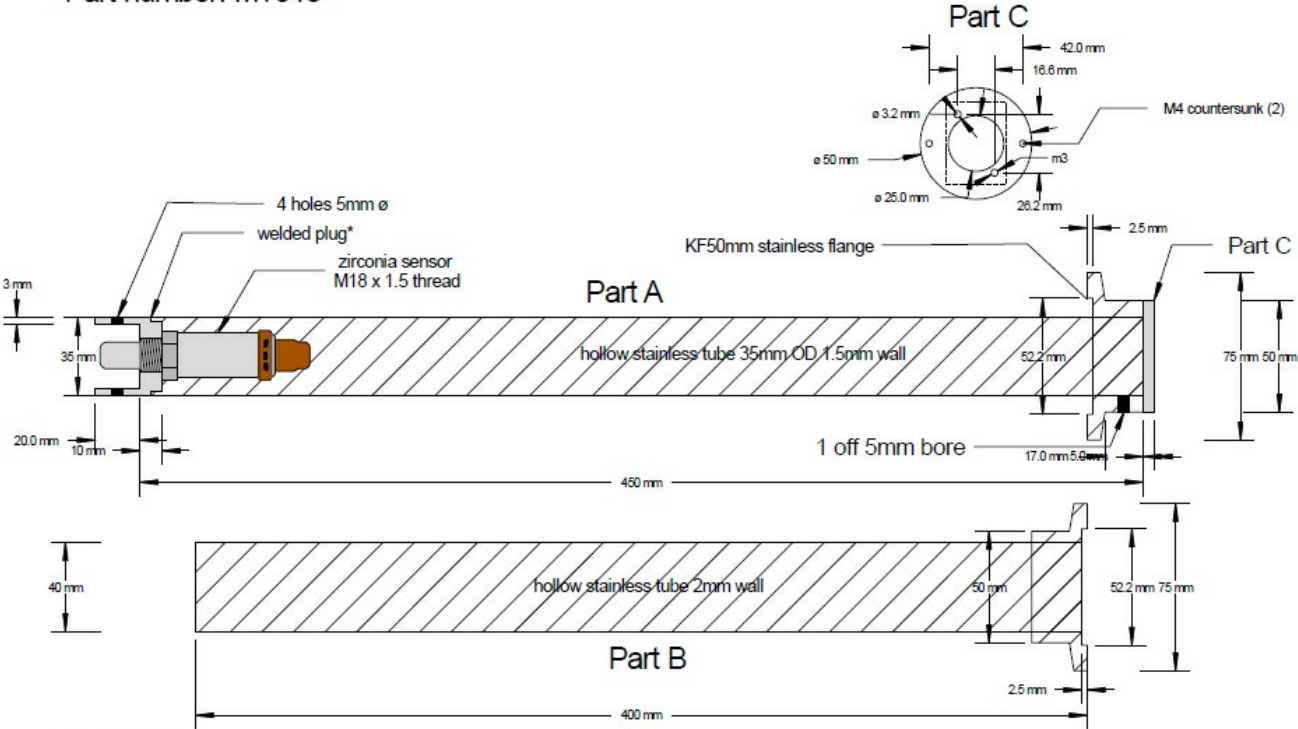

**Cambridge Sensotec Ltd.**  
 Unit 29 Stephenson Road  
 St Ives  
 Cambs  
 PE27 3WJ  
 England

**Telephone**  
 +44 (0)1480 462142  
**Facsimile**  
 +44 (0)1480 466032  
**Mobile**  
 +44 (0)7866 624236

**Email**  
 sales@cambridge-sensotec.co.uk  
**Web**  
 www.cambridge-sensotec.co.uk