


# Rapidox SF6 7100 Bench Gas Analyser

The Rapidox SF6 7100 Bench mountable gas analyser is designed for controlling and monitoring the quality of SF6 gas within a range of laboratory and field-based applications. These include medical testing, laboratory-based research and development, and the analysis of SF6 gas present in medium and high voltage gas insulated electrical equipment.



Exceptional accuracy and stability are provided when measuring the purity of SF6 gas, through specially selected sensors. The modular configuration allows for up to eight compatible gases to be analysed, simultaneously, with one analyser.

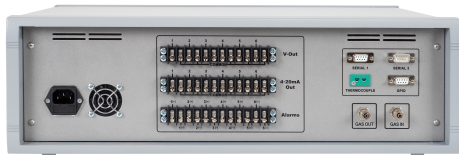

SF6 SO2 and H2O (dew point) gases are simultaneously analysed and data-logged to an exceptionally accurate standard. A gas output nozzle allows for the analyser to be attached to the Rapidox Gas Recovery Bag, ensuring that all sampled SF6 gas is recovered.



The Rapidox SF6 7100 Bench analyser is available as a complete instrument with swing carry handle or as a 19" cabinet rack mount format for industrial applications. Options include a set of genuine DN8 and DN20 fittings with a stainless steel braided hose (self-sealing couplings), and a separate thermal printer.



An optional pump enables two modes of operation. For SF6 sources at atmospheric pressure or below, the pump is activated to draw a sample through the analyser. Alternatively, the pump can be deactivated when sampling SF6 from a pressurised gas compartment up to 10 bar on the inlet. Gas flow is regulated manually via a rotary knob on the fascia and displayed electronically on the screen.

Please contact Cambridge Sensotec for further information or to discuss your requirements.

Though highly configurable to suit individual customer requirements, the Rapidox SF6 7100 Bench possesses a number of features to enhance functionality.

- Low maintenance sensors
- Easy calibration procedure
- Digital outputs
- Optional variable speed pump
- Fully programmable analogue outputs
- Powerful Rapidox software
- Operates on worldwide mains voltage
- Password protection
- Two fully programmable alarms

## SF6 Gas

SF6 is an extremely stable, non-flammable and highly electronegative gas with excellent dielectric properties. It is commonly used in medium and high-voltage electrical equipment as an electrical insulator, arc-quenching and cooling medium.

However, SF6 is classified as a greenhouse gas and must be kept within a closed circuit to avoid any deliberate release into the atmosphere. The international Kyoto agreement protocol has mandated reductions to harmful emissions amongst its member states.

For the power transmission and distribution network, SF6 technology remains essential. To protect personnel, equipment and the environment regular SF6 analysis should be adopted within the maintenance schedule. The early identification of any decomposition products and moisture within the SF6 gas will help avoid unnecessary shutdowns, outages and failures, in addition to reducing maintenance expenditures.

## Accessories



- 1 Calibration Kit and Service
- 2 Gas Recovery Bag
- 3 Sampling Kit

## Specification

<b>Ambient Operating Conditions</b>	Temperature 0°C to 40°C, Humidity 10 - 90% RH, Pressure 900 to 1100 mbar absolute
<b>Warm-up Time</b>	3-4 minutes at 20°C
<b>Sampling</b>	Timed or Continuous Sampling Modes
<b>Voltage</b>	90-260 VAC, 50/60Hz
<b>Voltage Outputs</b>	0-10V linear, user programmable
<b>Sample Connections</b>	Rectus style closed coupled fitting
<b>Current Outputs</b>	4-20mA linear, user programmable
<b>Digital outputs</b>	RS232 (RS485 option available). Data streamed on demand, Modbus RTU / Ethernet
<b>Max Inlet Pressure</b>	10 Bar gauge (protected)
<b>Optional Pump</b>	0-1 litres per minute
<b>Calibration</b>	Zero and span calibration with user selectable gas compositions
<b>Display</b>	7" (180mm) full-colour LCD with touchscreen operation; resolution 0.01ppm or 0.01%
<b>Analyser Dimensions</b>	Rack Mount: 132mm(H) x 482mm(W) x 365mm(D) Benchtop: 180mm (H) x 570mm (W) x 345mm (D)
<b>Alarms</b>	Relay circuits, user programmable
<b>Data Output/Optional Printer</b>	Excel compatible data via USB memory stick / Optional thermal printer
<b>Weight</b>	Rack Mount: 6.5kg Benchtop: 6.5kg

# Rapidox SF6 7100 Portable Sensor Specification

The modular configuration allows for up to eight compatible gases to be analysed simultaneously with one analyser.

SENSOR	SPECIFICATION	ACCURACY	CALIBRATION	LIFE SPAN	SENSOR TYPE
SF6 Sulphur Hexafluoride	0-100%	±0.5% accuracy	Every 12 months	> 5 years	Infrared (IR)
H2O Dew Point	-60°C to ±20°Cdp (10 - 24,000ppmV) Reading is corrected to either RT or 20°C	±2°Cdp of reading	Every 12 months by Sensor Exchange	2-3 years	Polymer
SO2 Sulphur Dioxide	0-100ppm OR 0-500ppm	±2% full-scale	Every 12 months	2-3 years	Electrochemical
HF Hydrogen Fluoride	0-10ppm OR 0-30ppm	±2% full-scale	Every 12 months (Using HCl gas)	2-3 years	Electrochemical
CF4* Tetrafluoromethane	0-80%	±1% of full reading	N/A	N/A	(measured by balance of SF6 + Air reading)
H2S Hydrogen Sulphide	0-100ppm	±2% full-scale	Every 12 months	2-3 years	Electrochemical
CO Carbon Monoxide	0-1,000ppm	±2% full-scale	Every 12 months	2-3 years	Electrochemical
Air	0-100%	±5% full-scale based on oxygen component	Every 12 months	2-3 years	Electrochemical O <sub>2</sub> scaled to read as Air

\* For analysers containing a CF4 sensor, the measurement of Air is also a requirement.

All sensor replacements to be carried out by Cambridge Sensotec or approved repair agents.

# Rapidox 7100 Sensor Matrix

Gas	SF <sub>6</sub>	O <sub>2</sub>	Air	CF <sub>4</sub>	H <sub>2</sub> O	SO <sub>2</sub>	CO	H <sub>2</sub> S	HF	CO / H <sub>2</sub> S
Sensor Type	IR	EC	EC	Balance	Polymer	EC	EC	EC	EC	EC
Life (Month)	60	36	36	N/A	36	36	36	36	36	36
Cal (Month)	12	12	12	N/A	12	12	12	12	12	12
0 - 100%										
0 - 80%										
0 - 60%										
0 - 30%										
0 - 5,000ppm										
0 - 2,000ppm										
0 - 1,000ppm										CO
0 - 500ppm										
0 - 200ppm										
0 - 150ppm										
0 - 100ppm										H <sub>2</sub> S
0 - 50ppm										
0 -20ppm										
0 -10ppm										
-60°C to +20°C										

Note: Not all sensor combinations are possible due to interference and cross-sensitivity effects. Please contact Cambridge Sensotec for advice.

Key: IR = Infra-Red Sensor    EC = Electrochemical Sensor